



PATENT  
ATTORNEY DOCKET NO.: TAIYO-5004

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE



Commissioner for Patents  
**BOX PATENT APPLICATION**  
Washington, D.C. 20231

**TRANSMITTAL FOR A NEWLY EXECUTED ORIGINAL APPLICATION  
UNDER 37 C.F.R. §1.53(b)**

This is a request for filing a patent application under 37 C.F.R. §1.53(b) for:

Inventor: Junichi ICHIKAWA

For: LIGHT SCANNING METHOD AND LIGHT SCANNING DEVICE

1. This is a new ☒ **Utility** ☐ **Design** ☐ **Plant** patent application.
2. The papers enclosed to obtain a filing date are as follows:  
33 Pages of Specification including  
0 Title Page  
4 Pages of Claims  
1 Page of Abstract  
13 Sheets of drawings containing 14 Figures  
☐ The enclosed drawing(s) are photograph(s), and there is also attached a  
PETITION TO ACCEPT PHOTOGRAPH(S) AS DRAWING(S)
3. Combined Declaration and Power of Attorney  
☐ Enclosed and is executed by all inventors.  
☒ Not Enclosed.  
This application is being filed under the provisions of 37 C.F.R. §1.53(f).  
Applicant(s) await notification from the Patent and Trademark Office of the time  
set for filing the Declaration and paying the filing fees.

## 4. Language

☒ English☐ Non-English

This application is being filed in accordance with 37 C.F.R. §1.52(d) and §608.01 of the MPEP. Applicant(s) await notification from the Patent and Trademark Office of the time set for filing the verified English translation and the processing fee.

## 5. Assignment

☐ An assignment of the invention to \_\_\_\_\_ and a PTO Form-1595, Recordation Form Cover Sheet, are enclosed.

☒ An assignment will be filed at a later date.

## 6. Priority - foreign applications under 35 U.S.C. §119(a)-(d) or §365(b) or PCT international applications under 35 U.S.C. §365(a) designating at least one country other than the U.S.

☒ Priority of the following foreign application is claimed:

Country	Application No.	Filed
Japan	2000-28462	February 4, 2000

Certified copy: ☒ is attached. ☐ will follow.

## 7. Priority based on provisional application(s) - 35 U.S.C. §119(e)

☐ Priority of the following provisional application(s) is claimed:

Application No.	Filed

## A. Relate Back - 35 U.S.C. §119(e)

- ☐ Amend the specification by inserting before the first line the sentence:  
 "This application claims priority of copending provisional application(s)  
 No. \_\_\_\_\_ filed on \_\_\_\_\_."

## 8. Small entity status

- ☐ A statement claiming small entity status under 37 C.F.R. §§1.9 and 1.27 is enclosed.

## 9. Fee Calculation (37 C.F.R. §1.16)

CLAIMS FOR FEE CALCULATION				
	Number Filed	Number Extra	at Rate of	Basic Fee Utility \$710.00 Design \$320.00
Total Claims (37 C.F.R. §1.16(c))	10 - 20 =	0	\$ 18.00 each=	\$0.00
Independent Claims (37 C.F.R. §1.16(b))	3 - 3 =	0	\$ 80.00 each=	\$0.00
Multiple dependent claim(s), if any (37 C.F.R. §1.16(d))			\$270.00	+
SUB-TOTAL =				\$710.00
Reduction by 1/2 for filing by a small entity				- \$
TOTAL FILING FEE =				\$710.00

## 10. Fee Payment

- ☒ Not Enclosed. **NO FEE IS BEING PAID BY CHECK OR DEPOSIT ACCOUNT AT THIS TIME.**  
 This application is being filed under the provisions of 37 C.F.R. §1.53(f).  
 Applicant(s) await notification from the Patent and Trademark Office of the time set for filing the Declaration and paying the filing fees.

☐ Enclosed.

Two checks in the amounts of \$\_\_\_\_\_ and \$40.00 representing the basic filing fee of \$710.00 and an assignment recording fee of \$40.00 is/are enclosed.

11. ☒ **Except** for issue fees payable under 37 C.F.R. §1.18, the Commissioner is hereby authorized by this paper to charge any additional fees during the entire pendency of this application including fees due under 37 C.F.R. §§1.16 and 1.17 which may be required, including any required extension of time fees, or credit any overpayment to Deposit Account 50-0310. This paragraph is intended to be a **CONSTRUCTIVE PETITION FOR EXTENSION OF TIME** in accordance with 37 C.F.R. §1.136(a)(3).

12. Additional papers enclosed:

- ☐ Preliminary Amendment
- ☐ Information Disclosure Statement
- ☐ Form PTO-1449, \_\_\_ document included
- ☐ Declaration of Biological Deposit
- ☐ Submission of "Sequence Listing", computer readable copy and/or amendment pertaining thereto for biotechnology invention containing nucleotide and/or amino acid sequence.

**Please accord this application an application number and filing date.**

Respectfully submitted,

**MORGAN, LEWIS & BOCKIUS LLP**

William O. Trousdell

William O. Trousdell

Reg. No. 38,637

Dated: November 28, 2000

**Customer No. 009629**

**MORGAN, LEWIS & BOCKIUS LLP**

1800 M Street, N.W.

Washington, D.C. 20036

(202) 467-7000

# LIGHT SCANNING METHOD AND LIGHT SCANNING DEVICE

## BACKGROUND OF THE INVENTION

### Field of Invention

The present invention relates to a light scanning method and a light scanning device, and more particularly to a light scanning method in a light scanning device which deflects plural light beams emitted from a light source by reflection surfaces of a deflector, and simultaneously main-scans by the plural light beams deflected by the deflector a surface to be scanned, and to a light scanning device.

### Description of the Related Art

Image recording apparatuses for recording images by light beams such as laser printers and electronic photocopiers are widely used. In such image recording apparatus, a photosensitive material is scanned by a light beam by means of a light scanning device.

In the light scanning device, generally, the light beam emitted from the semiconductor laser is modulated according to image data, and, via a collimator lens or the like, is incident on the reflection surfaces of a rotary polygonal mirror rotating at a predetermined speed.

By rotation of this rotary polygonal mirror, the light beam is deflected while its incident angle is being changed continuously, and the light beams scans the photosensitive material. The light beam reflected by the reflection surfaces of the rotary polygonal mirror is guided to the photosensitive material via an  $f\theta$  lens, a cylinder mirror (or cylinder lens), and the like, and scans the photosensitive material at a constant

speed and is focused on the photosensitive material. As a result, an image is exposed and recorded on the photosensitive material.

Recently, to meet the need for higher speeds of image forming apparatus, improvements in the scanning speed of the light scanning device have been desired. As a technology for improving the speed of a light scanning device, the simultaneous scanning method has been known in which plural scanning lines are scanned simultaneously by one scanning by using plural light beams.

In designing the optical system of the light scanning device of this simultaneous scanning system (hereinafter called plural-beam scanning optical system), the bow difference and pitch deviation between the plural light beams must be considered. Fig.9 shows bow difference occurring in the case of scanning with two light beams, and Fig. 10 shows pitch deviation when scanning with two light beams. In the diagrams, the broken line indicates an ideal scanning line position, and the solid line represents an actual scanning line position.

The bow difference means changes in the interval between two light beams in the subscanning direction depending on the scanning position in the main scanning direction, due to a difference in the curvature of the scanning lines formed by the light beams. The pitch deviation means widening or narrowing of the interval between scanning lines when two light beams are scanned simultaneously in a state in which the interval in the subscanning direction between the light beams deviates from a prescribed value. When scanning plural scanning lines simultaneously in one scanning by using plural light beams, if such bow

difference or pitch deviation occurs, the image becomes uneven in the subscanning direction, and the image quality is lowered. Such bow difference and pitch deviation must be suppressed in order to obtain image output of high image quality.

Generally, bow difference and pitch deviation are more likely to occur the further the plural beams are apart from the optical axis of the optical system. Conventionally, the plural beams were usually only two or at most four beams which were arranged in a row. When the light emitting points outputting the respective light beams were arranged in a row at the light source, even if the interval between the actual light emission points was wide (see distance "a" in Fig. 11), by inclining the entire light source obliquely in the subscanning direction, the interval between light emission points in the subscanning direction could be apparently narrowed (see distance "b" in Fig. 11), and deviation of the plural beams from the light source could be kept small. It was therefore relatively easy to decrease the bow difference and pitch deviation.

However, when the number of beams was further increased to further improve the speed, if the bow difference and pitch deviation were decreased by inclining the light source in the subscanning direction, on the contrary, the problem arose that the plural beams were widely apart in the mainscanning direction. Specifically, when the plural beams were apart in the main scanning direction, since the timing of each beam scanning a same point in the main scanning direction was different, the required buffer memory capacity for aligning the pixel positions in the main scanning direction increased, and a problem arose that the width of

the reflection surfaces of the rotary polygonal mirror in the main scanning direction had to be increased substantially.

According to the technology disclosed in Japanese Patent Application Laid-Open (JP-A) No. 5-294005, by disposing beams in a two-dimensional arrangement by using a VCSEL (Vertical Cavity Surface Emitting Laser Diode) as the light source, even if the number of beams is increased, the beams are prevented from greatly moving away from the optical axis of the optical system. However, in the case of the light source having light emission points disposed in a two-dimensional arrangement, unlike the conventional one-row arrangement light source, the interval between light emission points in the subscanning direction cannot be apparently narrowed by inclining the entire light source, and hence it is desired to solve the problems of bow difference and pitch deviation optically. So far, several methods have been proposed for reducing the bow difference or pitch deviation optically.

<Technology for reducing bow difference>

- 1) Using a  $f \sin \theta$  lens: JP-A No. 1-163717
- 2) Reducing the subscanning direction lateral magnification rate of an optical system: JP-A No. 2-54211, JP-A No. 9-281421
- 3) Canceling mutual bow differences occurring at plural positions: JP-A No. 2-129614, JP-A No. 8-118725
- 4) Specifying intersecting positions of plural beams: JP-A No. 6-18802, JP-A No. 7-209596, JP-A No. 9-274152
- 5) Limiting tolerance of bow difference: JP-A No. 6-202019
- 6) Balancing subscanning direction image plane curvature and



bow difference: JP-A No. 7-199109

7) Using an aspherical lens: JP-A No. 1-180501, JP-A No. 8-297256, JP-A No. 9-33850, JP-A No. 9-146030, JP-A No. 10-333069, JP-A No. 11-84285

8) Aligning plural beams in the bow direction: JP-A No. 10-68898, JP-A No. 10-293260

<Technology for reducing pitch deviation>

1) Making plural beams incident, in parallel, onto the surface to be scanned: JP-A No. 7-209596, JP-A No. 9-274151

Thus, various technologies for reducing either one of bow difference and pitch deviation have been proposed, but in an actual light scanning device of a simultaneous scanning system, both bow difference and pitch deviation must be suppressed. Of the aforementioned technologies, only the technology disclosed in JP-A No. 7-209596 refers to both bow difference and pitch deviation.

The technology disclosed in JP-A No. 7-209596 is as shown in Fig. 12. Light beams 104, 106 emitted from laser diodes 100, 102 are incident on a rotary polygonal mirror A through a collimator lens 108 and a cylindrical lens 110. After the light beams 104, 106 incident on the rotary polygonal mirror A are reflected by the reflection surfaces of the rotary polygonal mirror A, they pass through an anamorphic motion compensation optical system (MCO) 112, 114 having an  $f\theta$  lens, a cylindrical lens, and a cylindrical mirror, and leave the light scanning device in a state parallel to the system axis (optical system optical axis) 116. That is, occurrence of bow difference and pitch deviation is

suppressed by making the main exit beam of the light scanning device have a telecentric profile.

The cause of occurrence of bow difference in the plural-beam scanning optical system is, as mentioned above, that the light beam does not pass through the optical axis of the light beam. More specifically, the following two factors exist.

- Light beams are incident on a rotary polygonal mirror 200 at an angle with respect to the subscanning direction (see Fig. 13).
- Light beams pass outside of the optical axis of an  $f\theta$  lens 202 when passing through the  $f\theta$  lens 202 having power in the subscanning direction, or the beams enter the  $f\theta$  lens 202 at an angle with respect to the subscanning direction (see Fig. 14).

In the technology disclosed in JP-A No. 7-209596, the interval between the light emission points (interval between laser diodes 100, 102) of the semiconductor laser array used as the light source is as narrow as  $25\ \mu\text{m}$ . Thus, there is no need to consider the angle in the subscanning direction on the rotary polygonal mirror A of the two light beams 104, 106 and the  $f\theta$  lens of the anamorphic motion compensation optical system 112, 114, and both bow difference and pitch deviation can be decreased.

However, as is clear from Fig. 12, since the two light beams 104, 106 are incident on the rotary polygonal mirror A at different angles in the subscanning direction, when the interval between light emission points in the subscanning direction is large, the incident angle in the direction of the light beam on the rotary polygonal mirror A is large, and a bow

difference occurs due to deflection by the rotary polygonal mirror A. Further, since the light beams 104,106 are incident at an angle outside of the optical axis of the  $f \theta$  lens (the anamorphic motion compensation optical system), if the interval between light emission points is large, similarly, a bow difference occurs.

## SUMMARY OF THE INVENTION

The present invention has been devised to solve the above problems, and it is an object thereof to present a light scanning method and light scanning device capable of decreasing the bow difference and pitch deviation, regardless of the interval in the subscanning direction between light emission points for output of beams, when scanning simultaneously by using plural beams.

To achieve this object, a first aspect of the invention is a light scanning method comprising the steps of: (a) making plural light beams emitted from a light source incident at least onto reflection surfaces of a deflector in a mutually parallel state in a direction orthogonal to a main scanning direction; (b) deflecting the plural light beams by the deflector; and (c) focusing the plural light beams deflected by the deflector on a surface to be scanned, with an afocal relation between the reflection surfaces of the deflector and the surface to be scanned in the direction orthogonal to the main scanning direction.

A second aspect of the invention is a light scanning device which deflects plural light beams emitted from a light source by making the light beams incident on reflection surfaces of a deflector, and scans the

surface to be scanned simultaneously by the plural light beams deflected by the deflector, the device comprising: (a) a first optical system for making the plural light beams incident at least onto the reflection surfaces of the deflector in a mutually parallel state in a direction orthogonal to a main scanning direction; and (b) a second optical system for focusing the plural light beams, which were deflected by the deflector, onto a surface to be scanned, with an afocal relation between the reflection surfaces of the deflector and the surface to be scanned in the direction orthogonal to the main scanning direction.

According to the first and second aspects of the invention, in the direction orthogonal to the main scanning direction (hereinafter called the subscanning direction), plural light beams are incident on the reflection surfaces of the deflector in a mutually parallel state (the light beams are not parallel light, but have the same advancing direction). That is, when the plural light beams are incident on the reflection surfaces of the deflector, their optical axes are mutually parallel in the subscanning direction, thereby preventing occurrence of bow difference due to deflection by the deflector.

Moreover, since the reflection surfaces of the deflector and the surface to be scanned are in an afocal relation (light beams are incident thereon and exit therefrom in a parallel state), the plural light beams deflected by the deflector are incident on the surface to be scanned in a parallel state. Thus, by setting such an afocal relation, for example, when the light beams pass through an  $f\theta$  lens, occurrence of bow difference from the reflection surfaces of the deflector until the light

beams are incident on the surface to be scanned can be suppressed, and also occurrence of pitch deviation at times when there is fluctuation in the distance between the reflection surfaces of the deflector and the surface to be scanned can be suppressed.

That is, according to the first and second aspects of the invention, occurrence of bow difference and pitch deviation at the time of scanning the surface to be scanned simultaneously by plural light beams can be suppressed (or decreased).

In a third aspect of the invention, the light source emits the plural light beams in a mutually parallel state, and the first optical system may sets an afocal and conjugate relation between the light source and the reflection surfaces of the deflector.

In this case, the first optical system comprises a collimator lens for making the light beams emitted from the light source as divergent luminous flux into substantially parallel luminous flux, and a cylinder lens having power for condensing in the direction orthogonal to the main scanning direction, and focusing the light beams made into substantially parallel luminous flux by the collimator lens as a line which is long in the main scanning direction on the reflection surfaces of the deflector. The collimator lens and cylinder lens may be disposed such that the focal position at the light beam advancing direction downstream side of the collimator lens substantially coincides with the focal position at the light beam advancing direction upstream side of the cylinder lens.

For correcting the tilt of the reflection surfaces of the deflector simultaneously, the second optical system may focus the plural light

beams deflected by the deflector on the surface to be scanned while setting a conjugate relation between the reflection surfaces of the deflector and the surface to be scanned.

In this case, the second optical system comprises an  $f \theta$  optical system having power for condensing only in the main scanning direction, a first cylinder optical system having power for condensing in the direction orthogonal to the main scanning direction, and a second cylinder optical system having power for condensing in the direction orthogonal to the main scanning direction. The first cylinder optical system and second cylinder optical system are disposed such that the focal position at the light beam advancing direction downstream side of the first cylinder optical system substantially coincides with the focal position at the light beam advancing direction upstream side of the second cylinder optical system.

The power of the first cylinder optical system for condensing in the direction orthogonal to the main scanning direction may be smaller than the power of the second cylinder optical system for condensing in the direction orthogonal to the main scanning direction.

The light source may be a VCSEL array having plural light emission points disposed in a two-dimensional arrangement.

Therefore, the present invention results in the excellent effect of decreasing the bow difference and pitch deviation, regardless of the subscanning direction interval of light emission points for output of beams, when scanning simultaneously by using plural beams.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic structural diagram of an image forming apparatus comprising a optical scanning system according to an embodiment of the present invention.

Fig. 2 is a perspective view showing details of the structure of the light scanning device according to the embodiment of the present invention.

Fig. 3 is a diagram showing an example of an arrangement of light emission points in a laser array.

Fig. 4 is a block diagram showing an optical system of the light scanning device according to the embodiment of the present invention (an optical system from the laser array to a photosensitive drum in a case in which two cylinder mirrors are used).

Fig. 5 is a block diagram showing an example of an optical system from the laser array to the photosensitive drum in a case in which one cylinder mirror is used.

Fig. 6 is a block diagram showing an optical system from reflection surfaces of a rotary polygonal mirror to a photosensitive drum in a case in which the object side focal position of first cylinder mirror and the reflection surfaces of the rotary polygonal mirror coincide.

Fig. 7 is a block diagram showing an optical system from reflection surfaces of the rotary polygonal mirror to the photosensitive drum in a case in which the distance from the reflection surfaces of the rotary polygonal mirror to the first cylinder mirror is shorter than the object side focal length of the first cylinder mirror.

Fig. 8 is a block diagram showing an optical system from reflection surfaces of the rotary polygonal mirror to the photosensitive drum in a case in which the distance from the reflection surfaces of the rotary polygonal mirror to the first cylinder mirror is longer than the object side focal length of the first cylinder mirror.

Fig. 9 is a diagram for explaining bow difference.

Fig. 10 is a diagram for explaining pitch deviation.

Fig. 11 is a diagram for explaining a technique (of a prior art) for decreasing the bow difference and pitch deviation when using a light source having light emission points arranged in a row.

Fig. 12 is a block diagram showing a structure of an optical system for optically decreasing the bow difference and pitch deviation in the prior art.

Fig. 13 is a diagram for explaining factors for causing bow difference due to deflection by a rotary polygonal mirror.

Fig. 14 is a diagram for explaining factors for causing bow difference due to transmission through an  $f \theta$  lens.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the drawings, an example of a preferred embodiment of the present invention is described in detail below.

Fig. 1 shows a schematic structure of image forming apparatus 10. As shown in Fig. 1, the image forming apparatus 10 is covered with a casing 12.

An image forming section 14 is disposed in the casing 12. The



image forming section 14 includes a cylindrical photosensitive drum 16 rotating at a constant speed in the direction of arrow A shown in Fig. 1, and a light scanning device 18 for emitting light beams, while scanning, toward the photosensitive drum 16 (see arrow B in Fig. 1) on the basis of desired image data (gray scale image data in the present embodiment in which the image forming apparatus 10 is designed to form monochromatic images).

A charger 20 is disposed in a vicinity of the peripheral surface of the photosensitive drum 16. The charger 20 charges the photosensitive drum 16 uniformly. The photosensitive drum 16 uniformly charged by the charger 20 rotates in the direction of arrow A, and is irradiated with light beams from the light scanning device 18. Thus, a latent image is formed on the peripheral surface of the photosensitive drum 16.

In the rotating direction of the photosensitive drum 16, at the downstream side from the position of irradiating light beams by the light scanning device 18, a developer 22 for supplying toner to the photosensitive drum 16 is disposed, facing the circumferential surface of the photosensitive drum 16. The toner supplied from the developer 22 is applied to the portions irradiated with light beams from the light scanning device 18. As a result, a toner image is formed on the peripheral surface of the photosensitive drum 16.

In the rotating direction of the photosensitive drum 16, at the downstream side from the location of the developer 22 (a position beneath the axial center of the photosensitive drum 16), a charger for transfer 24 is disposed, facing the circumferential surface of the



mirror 52 is rotated at high speed in the direction of arrow D by a motor (not shown in the drawings).

The laser array 50 is a VCSEL having plural light emission points 54 disposed in a two-dimensional arrangement. Fig. 3 shows an example of this laser array 50. As shown in Fig. 3, the laser array 50 consists of a total of 36 light emission points 54 disposed in a two-dimensional arrangement, that is, six in the main scanning direction and six in the subscanning direction at specific intervals. The light emission points 54 arranged in the main scanning direction are shifted by one step each in the subscanning direction, which one step is equal to the distance between two light emission points 54 adjacent in the subscanning direction divided into six equal sections. That is, as far as the subscanning direction is concerned, a light emission point 54 is disposed at each step. By thus shifting the light emission points 54 in the subscanning direction, all light emission points 54 can scan different scanning lines (so that 36 scanning lines can be scanned simultaneously).

From each light emission point 54 of the laser array 50, a light beam LB modulated according to desired image data is emitted. Since the laser array 50 is a VCSEL, plural light beams LB are emitted in parallel (not as parallel light, but as light beams having the same advancing direction).

At the downstream side in the advancing direction of the plural light beams LB emitted from the light emission points 54, as shown in Fig. 2, a collimator lens 56, an aperture 58, a cylinder lens 60, and a mirror 61 are disposed sequentially. The plural light beams LB emitted from the





light beam LB is guided to the photosensitive drum 16, and focused on the circumferential surface of the photosensitive drum 16.

The first cylinder mirror 64A and second cylinder mirror 64B are disposed so that the image side focal position of the first cylinder mirror 64A and the object side focal position of the second cylinder mirror 64B coincide with each other (that is, the optical path length between the two mirrors is the sum of the focal length of the first cylinder mirror and the focal length of the second cylinder mirror). Thus, the reflection surface 52A of the rotary polygonal mirror 52 and the scanning position on the peripheral surface of the photosensitive drum 16 are in an afocal and conjugate relation in the subscanning direction.

However, the first cylinder mirror 64A and second cylinder mirror 64B are both required to have a positive power (that is, a condensing power, and the greater this power, the shorter is the focal length). In a positive-negative or negative-positive combination, an afocal and conjugate relation cannot be established. Note that in the following explanation, both the cylinder mirror 64A and the cylinder mirror 64B are called the cylinder mirror 64 if it is not required to distinguish between the first and second cylinder mirrors 64A, 64B particularly.

The operation of the present embodiment is explained below with reference to Fig. 4.

Plural (36 arranged in the subscanning direction) light beams emitted from the light emission points 54 of the laser array 50 are made into substantially parallel light by means of the collimator lens 56, shaped



on the circumferential surface of the photosensitive drum 16 by the first cylinder mirror 64A and second cylinder mirror 64B having power only in the subscanning direction. That is, the plural light beams LB are focused on the circumferential surface of the photosensitive drum 16 without bow difference arising.

When focusing by one cylinder mirror only, as shown in Fig. 5, since plural beams are incident on the photosensitive drum 16 in a non-parallel state, pitch deviation may occur due to fluctuations in the distance between the peripheral surface of the light scanning device 18 and photosensitive drum 16. However, as mentioned above, by using two cylinder mirrors, that is, the first cylinder mirror 64A and second cylinder mirror 64B, since the reflection surface 52A of the rotary polygonal mirror 52 and the scanning position of the circumferential surface of the photosensitive drum 16 are in an afocal relation, the plural beams are incident on the circumferential surface of the photosensitive drum 16 in a parallel state, and occurrence of pitch deviation can be suppressed.

Thus, according to the present embodiment, an images of 36 scanning lines can be written by scanning the circumferential surface of the photosensitive drum 16 simultaneously with 36 light beams, while suppressing occurrence of bow difference and pitch deviation.

Further, in order to correct the tilt error of the plural reflection surfaces 52A of the rotary polygonal mirror 52 (that is, to correct the plane tilt), generally, a conjugate relation is set between the reflection surface 52A of the rotary polygonal mirror 52 and the scanning position



on the circumferential surface of the photosensitive drum 16. In this case, this conjugate relation is satisfied at the same time. That is, plane tilt correction can be achieved simultaneously.

The writing density (scanning line interval) at this time is explained hereinafter by use of specific numerical examples. In the present embodiment, the laser array 50 is used in which a total of 36 (=6x6) light emission points 54 are disposed in two-dimensional arrangement, consisting of six at intervals of 30  $\mu\text{m}$  in the main scanning direction and six at intervals of 30  $\mu\text{m}$  in the subscanning direction. The light emission points 54 arranged in the main scanning direction are shifted by 5  $\mu\text{m}$  each in the subscanning direction. That is, in the subscanning direction, the light emission points 54 are disposed at intervals of 5  $\mu\text{m}$ , and 36 light beams LB are emitted from the laser array 50 at intervals of 5  $\mu\text{m}$  in the subscanning direction.

In this laser array 50, the light emission point interval between both ends of the subscanning direction is 180  $\mu\text{m}$ . That is, the distance between the both end beams is 180  $\mu\text{m}$ . This is a value with which it is difficult to decrease the bow difference and pitch deviation simultaneously in the optical system in the prior art.

The focal length of the collimator lens 56 is 25 mm and the focal length of the cylinder lens is 100 mm. Therefore, when the light beams are incident on the rotary polygonal mirror 52, the beam interval of the plural beams in the subscanning direction is multiplied by four (=100/25).

The optical path length between the rotary polygonal mirror 52 and

the photosensitive drum 16 is 360 mm, and the relation with the focal length of the first cylinder mirror 64A and second cylinder mirror 54B disposed therebetween is as shown in Table 1.

Table 1

Focal length of first cylinder mirror (mm)	Focal length of second cylinder mirror (mm)	Conjugate magnification	Optical path length between rotary polygonal mirror and first cylinder mirror (mm)	Optical path length between first and second cylinder mirrors (mm)	Optical path length between second cylinder mirror and photosensitive drum (mm)
130	68.77	-0.529	78.2	198.8	83.0

As shown in Table 1, since the conjugate magnification between the rotary polygonal mirror 52 and the photosensitive drum 16 is 0.529 ( $=68.77/130$ ), the multiplication in the subscanning direction of the entire optical system of the light scanning device 18 is 2.116 ( $=4 \times 0.529$ ). Therefore, when the plural light beams emitted from the laser array at the subscanning direction interval of  $5 \mu\text{m}$  are focused on the photosensitive drum 16, the image can be written at intervals of 10.58 ( $=5 \times 2.116$ ), that is, 2400 dpi (image writing density in subscanning direction).

Thus, in the present embodiment, if the subscanning direction distance between plural beams emitted from the light source is long (180

μm), the bow difference and pitch deviation can be suppressed, and the image can be written at high speed and high writing density (240 dpi) by scanning simultaneously with plural light beams.

The cylinder mirror 64 (especially the second cylinder mirror 64B) is disposed after the rotary polygon mirror 52 in the direction in which light advances, and reflects the deflected and scanned light beams, and is hence large in length. For reducing the size of the light scanning device 18, it is desired to shorten the length of the cylinder mirror 64, and it is necessary for this purpose to dispose the cylinder mirror 64, especially the second cylinder mirror 64B, apart from the photosensitive drum 16 as far as possible.

Besides, if the second cylinder mirror 64B is close to the photosensitive drum 16, the beam diameter on the mirror is small, and flaws or stains on the mirror surface may have effects on the focusing state of the light beams LB (flaws or stains appear in an enlarged manner). To decrease the effects of flaws or stains, it is preferred that the second cylinder mirror 64B be disposed apart from the photosensitive drum 16 as far as possible. On the other hand, for reducing the size of the image forming apparatus 10, it is desired that the light scanning device 18 and the photosensitive drum 16 be disposed as closely to each other as possible, and there may be a limit to the distance (the optical path length) between the rotary polygonal mirror 52 and the photosensitive drum 16.

Accordingly, without changing the distance (optical path length) between the rotary polygonal mirror 52 and the photosensitive drum 16 and the conjugate magnification (writing density in the subscanning

direction), examples of changing the distance (optical path length) between the second cylinder mirror 64B and the photosensitive drum 16 are shown in Table 2. In the examples shown in Table 2, the optical path length between the rotary polygonal mirror 52 and the photosensitive drum 16 is 360 mm, and the conjugate magnification between the rotary polygonal mirror 52 and photosensitive drum 16 is -0.5.

Table 2

No	Focal length of first cylinder mirror (mm)	Focal length of second cylinder mirror (mm)	Conjugate magnification	Optical path length between rotary polygonal mirror and first cylinder mirror (mm)	Optical path length between first and cylinder mirrors (mm)	Optical path length between second cylinder mirror and photosensitive drum (mm)
1	100	50	-0.5	180.346633	150	29.65337
2	110	55	-0.5	150.346633	165	44.65337
3	120	60	-0.5	120.346635	180	59.65337
4	130	65	-0.5	90.346638	195	74.65336
5	140	70	-0.5	60.346641	210	89.65336
6	150	75	-0.5	30.346644	225	104.6534



optical path length between the second cylinder mirror and the photosensitive drum 16 is shorter than the focal length of the second cylinder mirror 64B. In this case, as shown in Fig. 8, the exit light from the first cylinder mirror is condensed light, and the optical path length between the second cylinder mirror 64B and the photosensitive drum 16 is shorter than  $F_2$ .

Thus, by selecting the relation between the object side focal position of the first cylinder mirror 64A and the reflection surface 52A of the rotary polygonal mirror 52, that is, by changing the convergent state of the light beams emitted from the first cylinder mirror 64A, the optical path length of the second cylinder mirror 64B and the photosensitive drum 16 can be adjusted without changing the optical path length and conjugate magnification (writing density in the subscanning direction) between the rotary polygonal mirror 52 and the photosensitive drum 16. In other words, in order to focus the light beams on the circumferential surface of the photosensitive drum 16 by using two cylinder mirrors, that is, the first and second cylinder mirrors 64A, 64B, it is possible to adjust the optical path length between the photosensitive drum 16 and the cylinder mirror (second cylinder mirror 64B).

If the optical path length or conjugate magnification between the rotary polygonal mirror 52 and the photosensitive drum 16 is changed, by changing the convergent state of the light beams emitted from the first cylinder mirror 64A, the optical path length between the second cylinder mirror 64B and the photosensitive drum 16 can be adjusted.

However, as in the present embodiment, if the  $f\theta$  lens 62 does not

have power in the subscanning direction, in order to decrease the image curvature in the subscanning direction to an extent that does not present problems in practice, it is desired to set the conjugate relation of the rotary polygonal mirror 52 and the photosensitive drum 16 in a reducing system (conjugate magnification  $< 1$ ), that is, the focal length of the second cylinder lens is shorter than the focal length of the first cylinder lens 60.

In this example, the optical system is composed of the  $f\theta$  lens, first cylinder mirror and second cylinder mirror, but the present invention is not limited to this example. Instead of the  $f\theta$  lens, an  $f\theta$  mirror may be used, or at least one of the first and second cylinder mirrors may be replaced by a cylinder lens.

In the present embodiment, the light scanning device 18 according to the invention is used in the image forming apparatus 10, but the present invention is not limited to this embodiment alone. The present invention may be applied to any image forming apparatus for forming an image by scanning light beams.



What is claimed is:

1. A light scanning method comprising the steps of:

(a) making plural light beams emitted from a light source incident at least onto reflection surfaces of a deflector in a mutually parallel state in a direction orthogonal to a main scanning direction;

(b) deflecting the plural light beams by said deflector; and

(c) focusing the plural light beams deflected by said deflector on a surface to be scanned, with an afocal relation between the reflection surfaces of the deflector and the surface to be scanned in the direction orthogonal to the main scanning direction.

2. A light scanning device which deflects plural light beams emitted from a light source by making the light beams incident on reflection surfaces of a deflector, and scans the surface to be scanned simultaneously by the plural light beams deflected by the deflector, the device comprising:

(a) a first optical system for making the plural light beams incident at least onto the reflection surfaces of the deflector in a mutually parallel state in a direction orthogonal to a main scanning direction; and

(b) a second optical system for focusing the plural light beams, which were deflected by the deflector, onto a surface to be scanned, with an afocal relation between the reflection surfaces of the deflector and the surface to be scanned in the direction orthogonal to the main scanning direction.

3. The light scanning device of claim 2, wherein said light source emits the plural light beams in a mutually parallel state, and said first

optical system sets an afocal and conjugate relation between said light source and the reflection surfaces of said deflector.

4. The light scanning device of claim 3, wherein said first optical system comprises a collimator lens for making the light beams emitted from the light source as divergent luminous flux into a substantially parallel luminous flux, and a cylinder lens having power for condensing into the direction orthogonal to the main scanning direction, and focusing the light beams made into substantially parallel luminous flux by the collimator lens as a line which is long in the main scanning direction on the reflection surfaces of the deflector, and

said collimator lens and cylinder lens are disposed such that a focal position at a light beam advancing direction downstream side of the collimator lens substantially coincides with a focal position at a light beam advancing direction upstream side of the cylinder lens.

5. The light scanning device of claim 2, wherein said second optical system focuses the plural light beams deflected by said deflector on the surface to be scanned, while setting a conjugate relation between the reflection surfaces of the deflector and the surface to be scanned.

6. The light scanning device of claim 5, wherein said second optical system comprises an  $f\theta$  optical system having power for condensing only in the main scanning direction, a first cylinder optical system having power for condensing in the direction orthogonal to the main scanning direction, and a second cylinder optical system having power for condensing in the direction orthogonal to the main scanning direction, and



power for condensing only in the main scanning direction, a first cylinder optical system having power for condensing in the direction orthogonal to the main scanning direction, and a second cylinder optical system having power for condensing in the direction orthogonal to the main scanning direction,

wherein said first optical system sets an afocal and conjugate relation between the light source and reflection surfaces of the deflector, and said second optical system focuses the plural light beams deflected by said deflector onto the surface to be scanned while setting a conjugate relation between the reflection surfaces of the deflector and the surface to be scanned.

10. The light scanning device of claim 9, wherein said deflector is a rotary polygonal mirror rotating at a predetermined speed.

## ABSTRACT OF THE DISCLOSURE

A laser array and a reflection surface of a rotary polygonal mirror are set in an afocal and conjugate relation by a collimator lens. The reflection surface of the rotary polygonal mirror and a scanning position of a peripheral surface of a photosensitive drum are set in an afocal and conjugate relationship by first and second cylinder mirrors. Therefore, plural light beams emitted from light emission points of the laser array are made incident on and deflected by the reflection surface of the rotary polygonal mirror, in a parallel state and without forming an angle with respect to the subscanning direction. The plural light beams are then incident on the peripheral surface of the photosensitive drum in a parallel state and focused thereon. Accordingly, bow difference and pitch deviation are decreased regardless of an interval between light emission points for output of the respective light beams.

FIG. 1

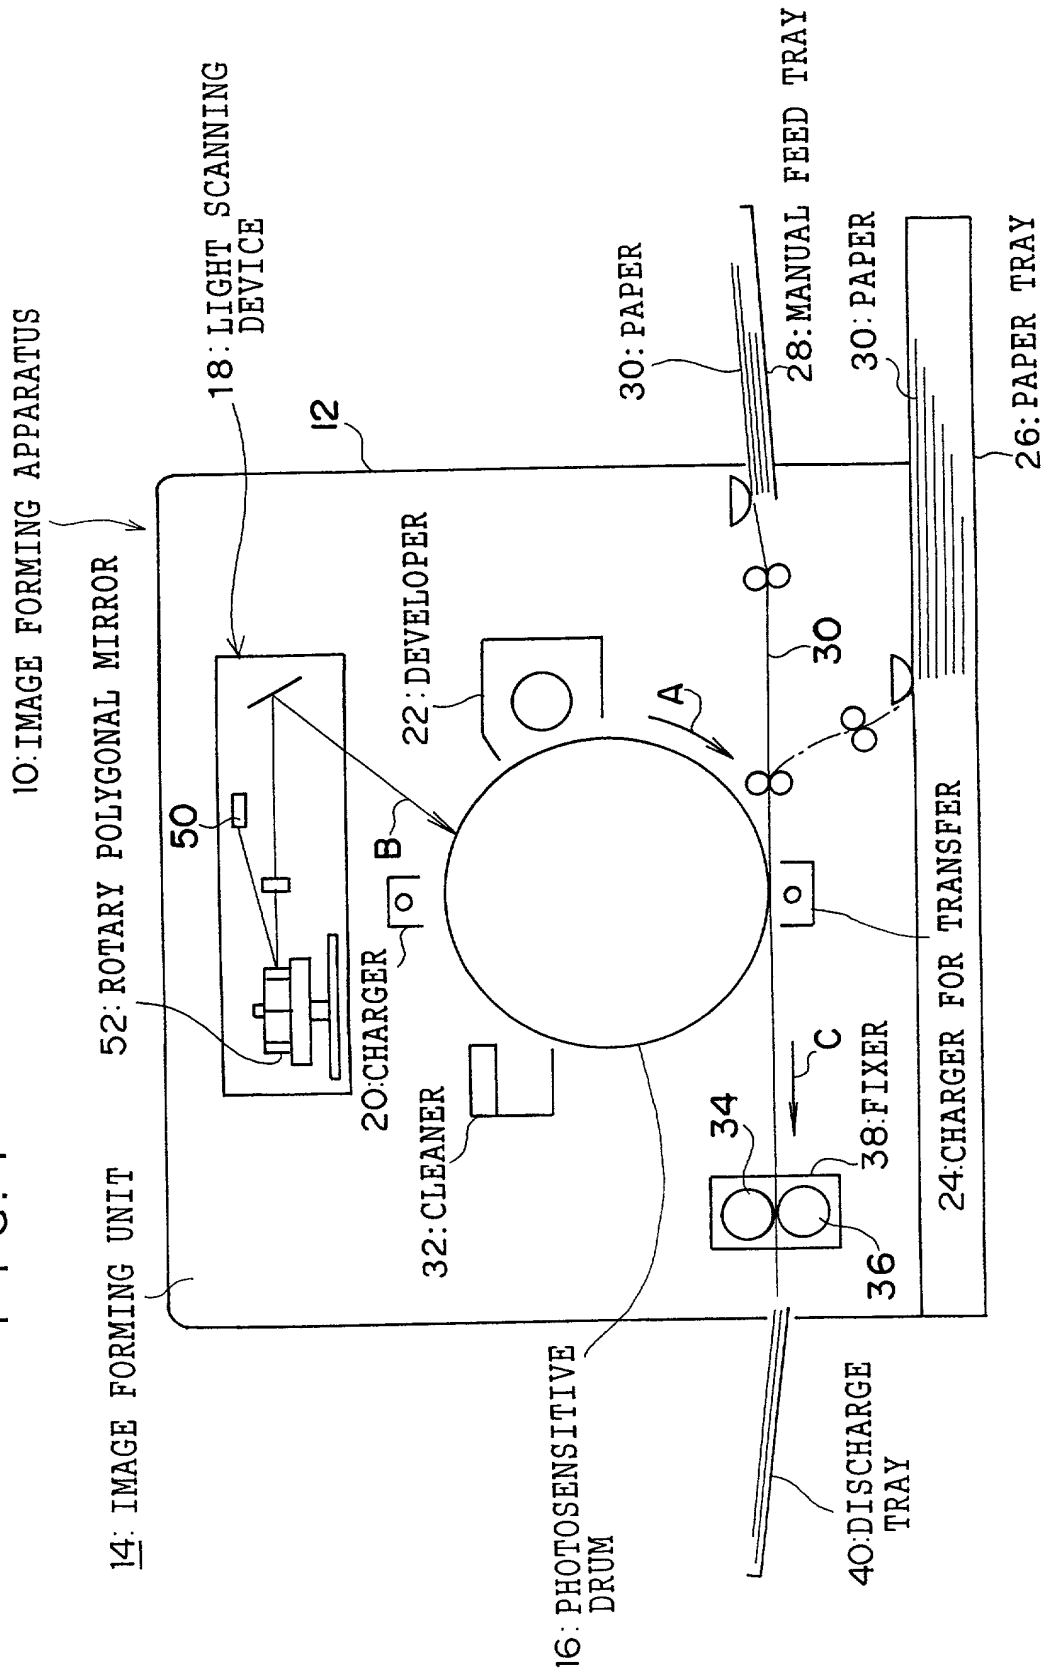


FIG. 2

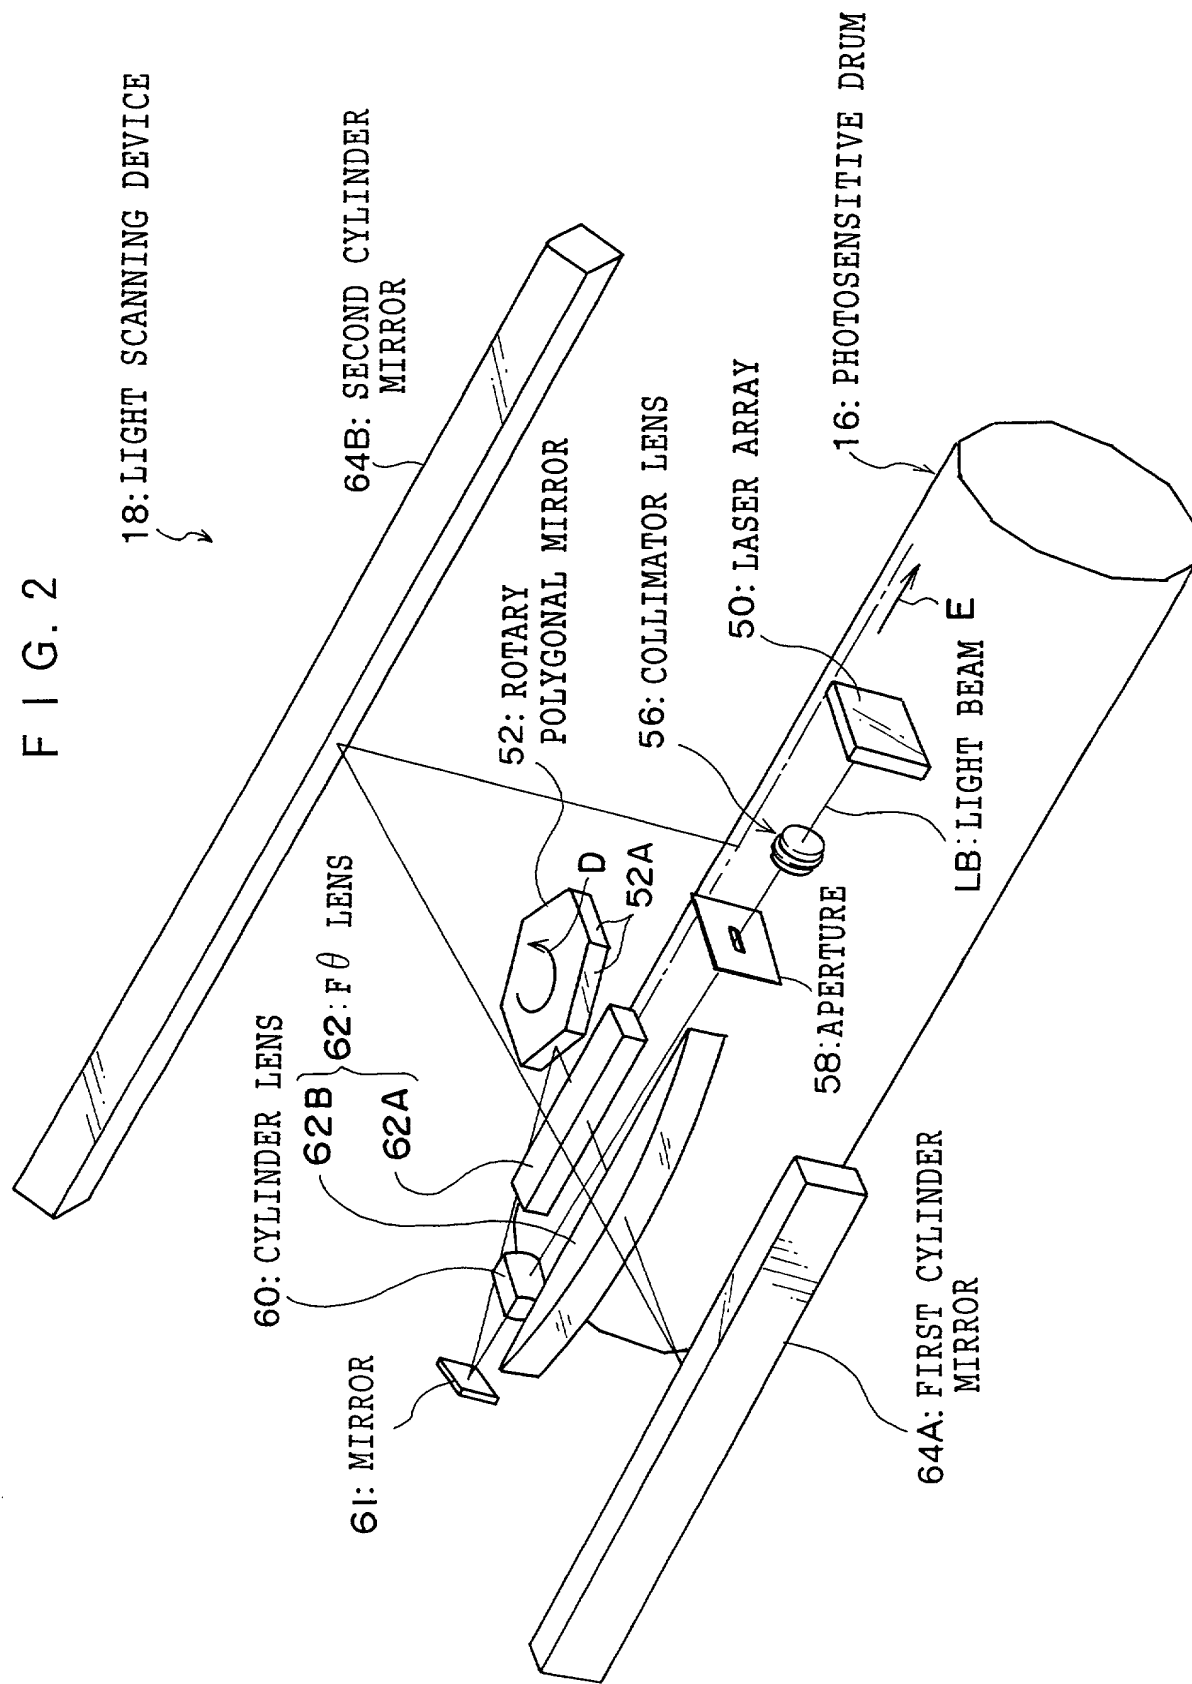


FIG. 3

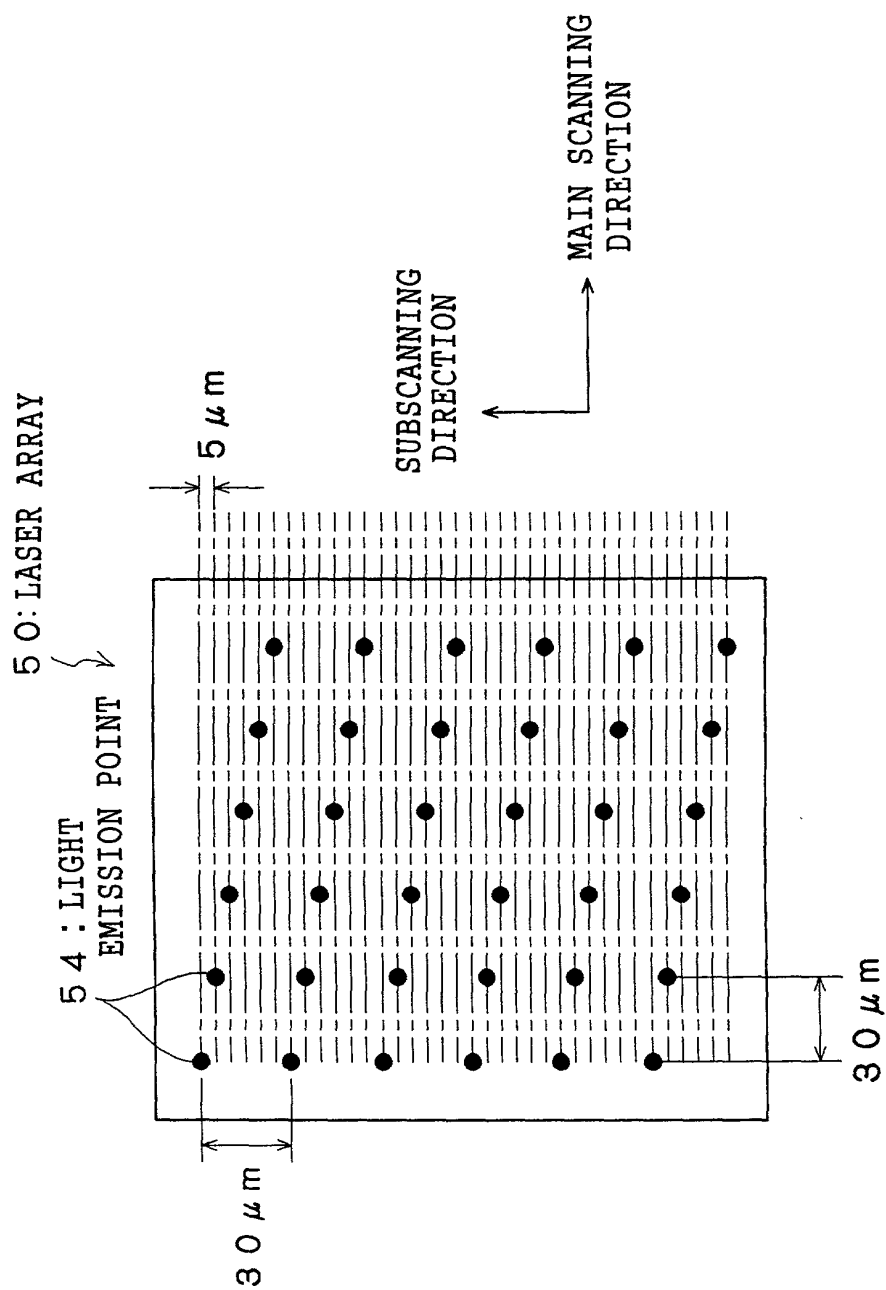




FIG. 4


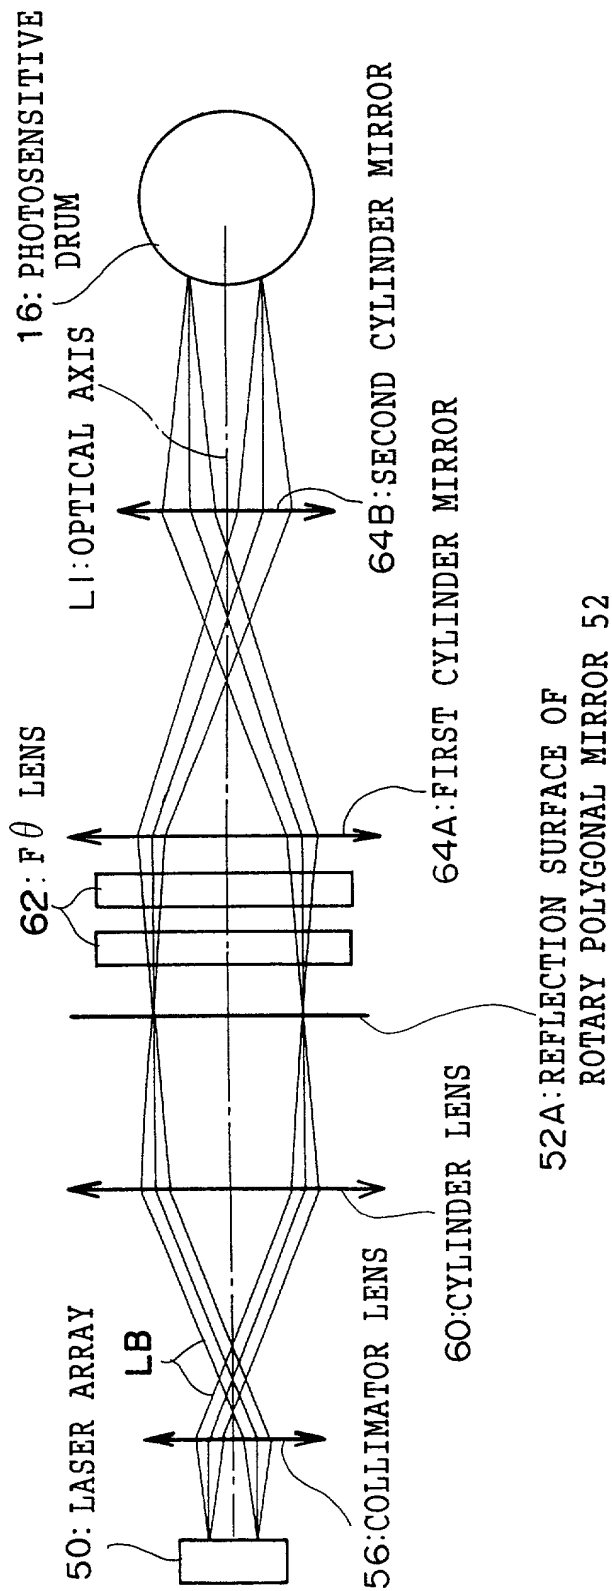


FIG. 5

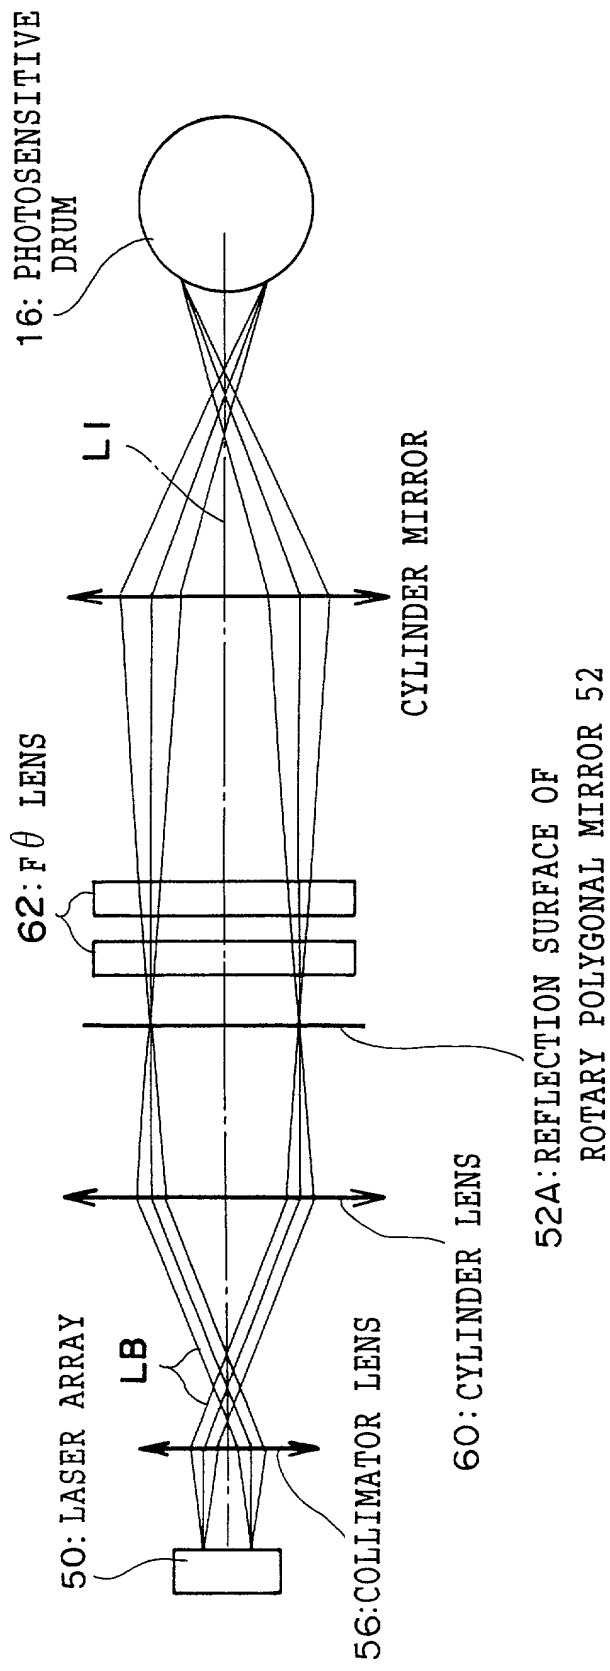

F I G. 6



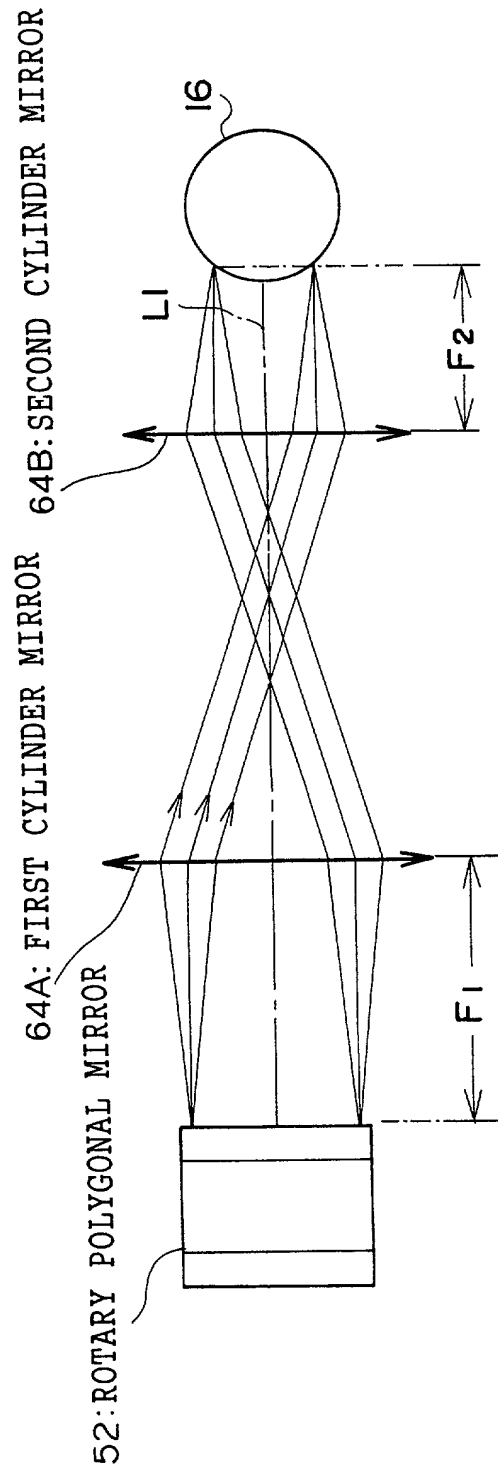



FIG. 7

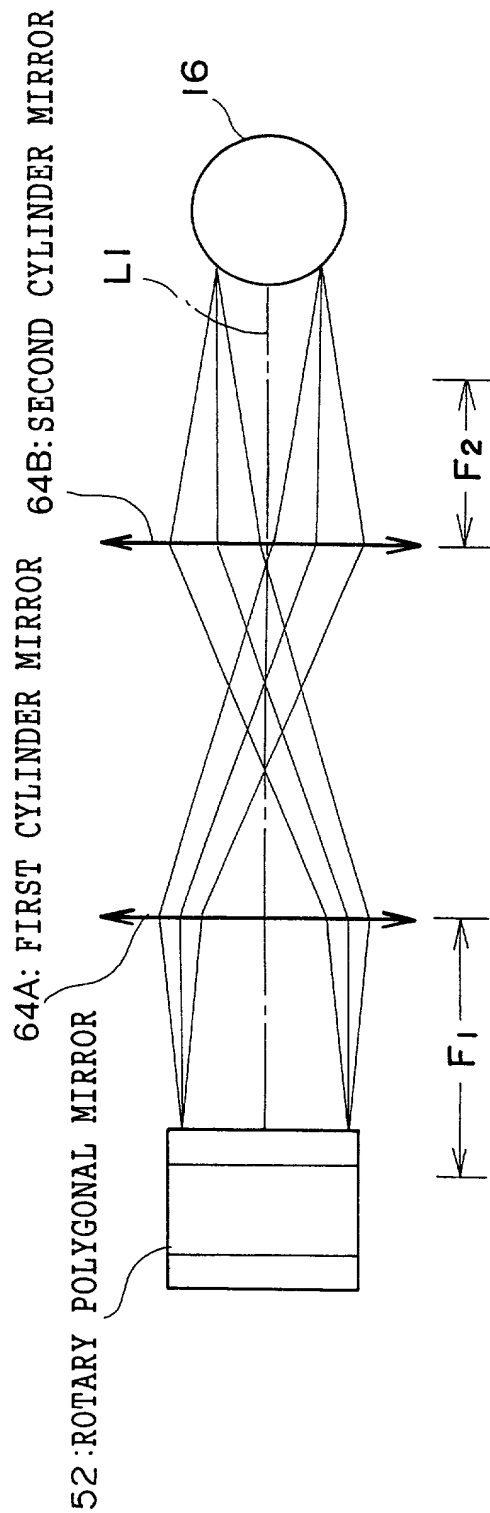

F I G . 8

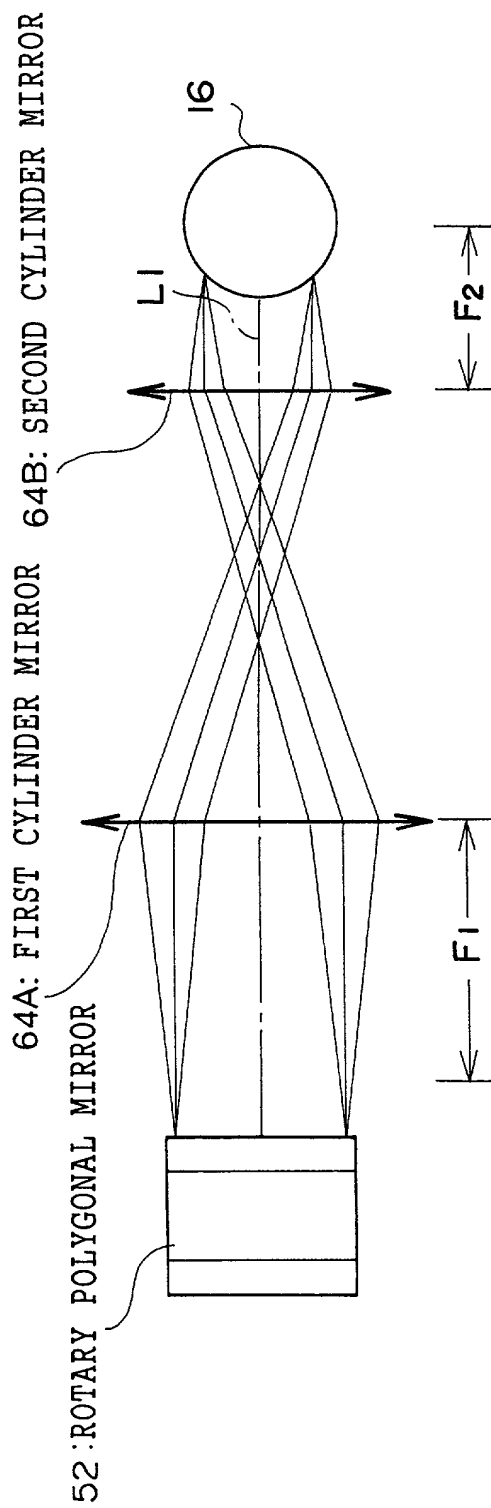

F I G. 9

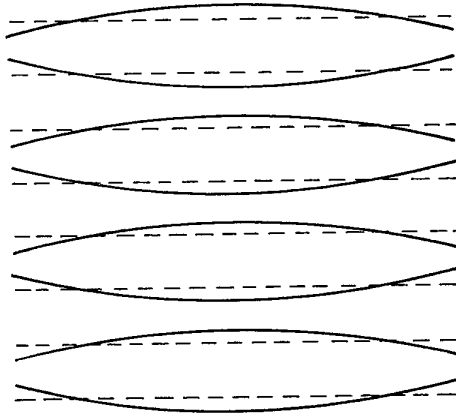

F I G. 1 0

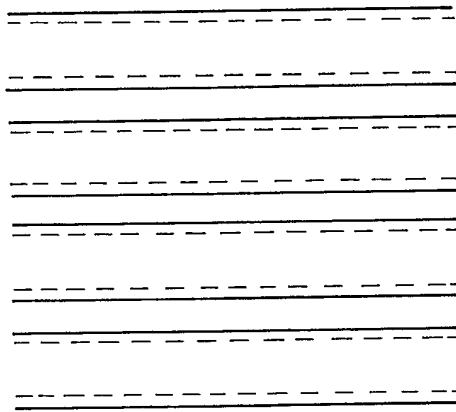


FIG. 11



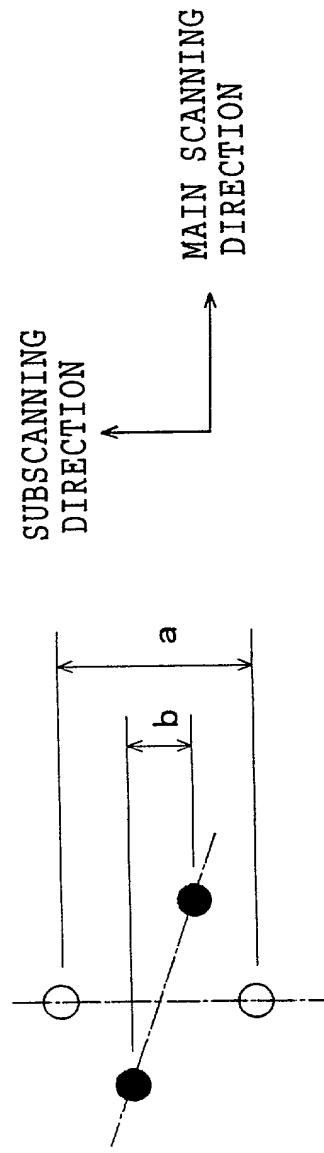


FIG. 12



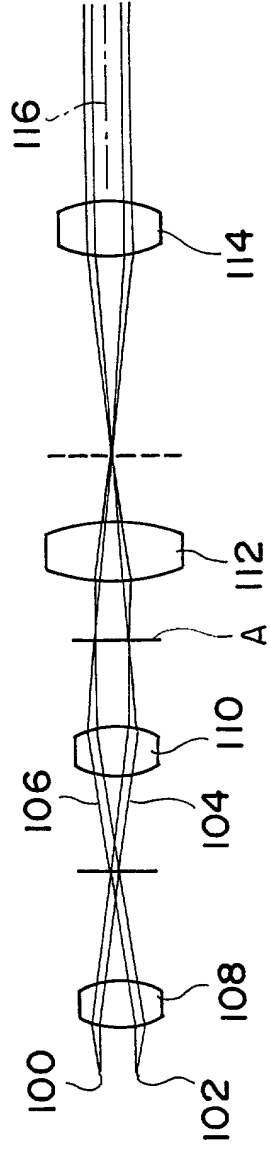

F I G . 1 3

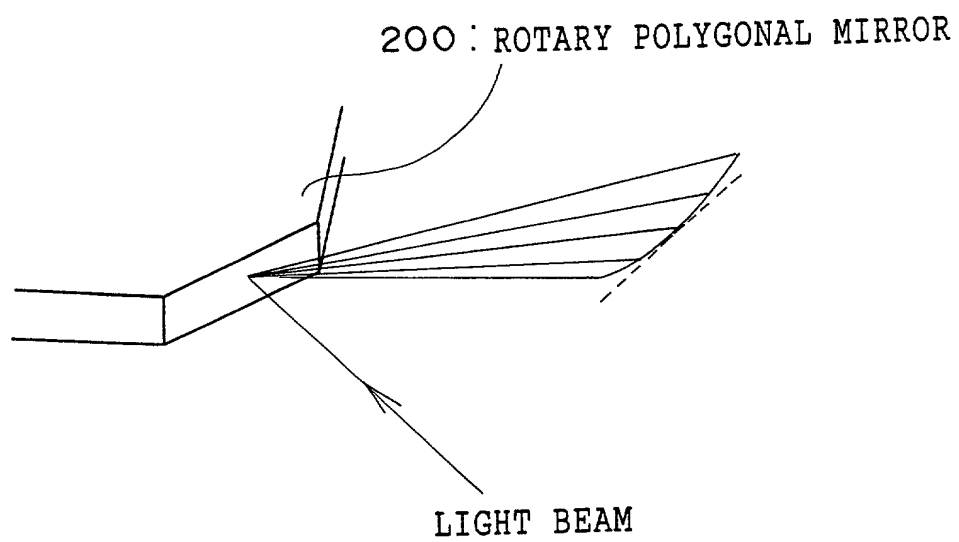

F I G. 1 4

